


N-Channel Multilayer Epitaxial Super Junction Power MOSFET

MCR65B580D
TO-252

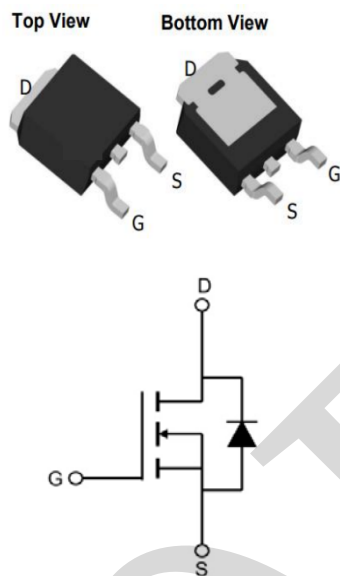

V_{DS}	650	V
$R_{DS(on),MAX}@ V_{GS}=10\text{ V}$	580	m Ω
I_D	7.3	A

Features

- New technology for high voltage device
- Low on-resistance and low conduction losses
- small package
- Ultra Low Gate Charge cause lower driving requirements
- 100% Avalanche Tested
- ROHS compliant

Application

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)

Maximum ratings, at $T_A = 25^\circ\text{C}$, unless otherwise specified

Symbol	Parameter		Rating	Unit
V(BR)DSS	Drain-Source breakdown voltage		650	V
VGS	Gate-Source voltage		±25	V
ID	Continuous drain current @VGS=10V	Tc=25°C	7.3	A
		Tc=100°C	4.5	A
IDM	Pulse drain current tested (Note 1)	Tc=25°C	24	A
EAS	Avalanche energy, single pulsed L=10mH,VDS= 50V, RG = 25 Ω, Tc=25°C		129	mJ
PD	Maximum power dissipation	Tc=25°C	60	W
TSTG,TJ	Storage and Junction Temperature Range		-55 to +150	°C

Thermal Characteristics

Symbol	Parameter	Typical	Unit
R _{θJC}	Thermal Resistance, Junction-to-Case	2.1	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient	62.5	°C/W

Electrical Characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
--------	-----------	-----------	------	------	------	------

Static Electrical Characteristics @ T_j=25°C (unless otherwise stated)

V(BR)DSS	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	650	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =650V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±30V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	2.0	--	4.0	V
R _{DS(on)}	Static Drain- to- Source On-Resistance (Note 2)	V _{GS} =10V, I _D =2A	--	--	580	mΩ

Dynamic Electrical Characteristics @ T_j = 25°C (unless otherwise stated)

C _{iss}	Input Capacitance	V _{DS} =50V, V _{GS} =0V, f=400kHz	--	471	--	pF
C _{oss}	Output Capacitance		--	35	--	pF
C _{rss}	Reverse transfer Capacitance		--	1.7	--	pF
Q _g	Total Gate Charge	V _{DS} =520V, I _D =7.3A , V _{GS} =10V	--	13	--	nC
Q _{gs}	Gate-Source Charge		--	2.1	--	nC
Q _{gd}	Gate-Drain Charge		--	6.9	--	nC

Switching Characteristics

Td(on)	Turn-on Delay Time	V _{DS} =325V, I _D =7.3A, V _{GS} =10V, R _G =25Ω	--	17	--	ns
Tr	Turn-on Rise Time		--	26	--	ns
Td(off)	Turn-Off Delay Time		--	53	--	ns
Tf	Turn-Off Fall Time		--	38	--	ns

Source- Drain Diode Characteristics@ T_j = 25°C (unless otherwise stated)

I _S	Continuous Source Current	T _C =25°C	--	--	7.3	A
I _{SM}	Maximum Pulsed Current	T _C =25°C	--	--	24	A
VSD	Forward on voltage	I _S =7.3A, V _{GS} =0V	--	--	1.4	V
Trr	Reverse Recovery Time	V _R =100V , I _S =7.3A ,	--	220	--	ns
Qrr	Reverse Recovery Charge	di/dt=100A/μs	--	2	--	uC

NOTE:

- (Note 1) Repetitive rating: pulse-width limited by maximum junction temperature.
- (Note 2) Pulse Test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%.

Typical Characteristics

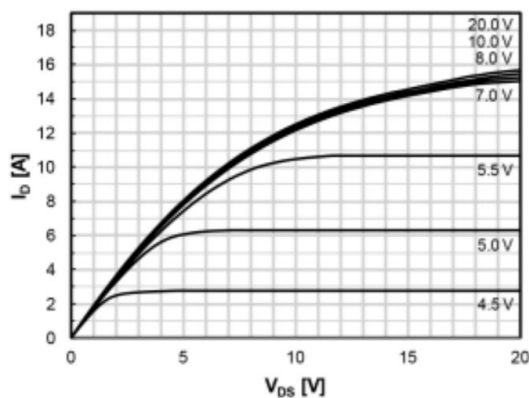


Fig. 1 Output Characteristics

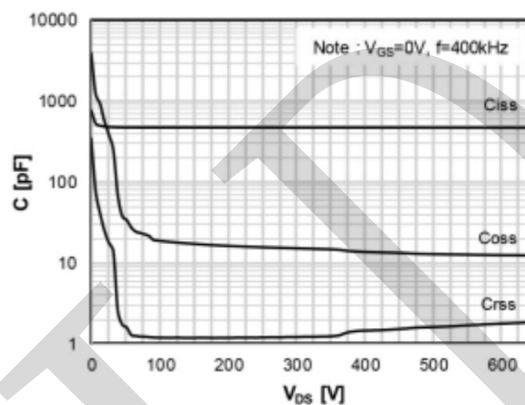


Fig. 2 Capacitances

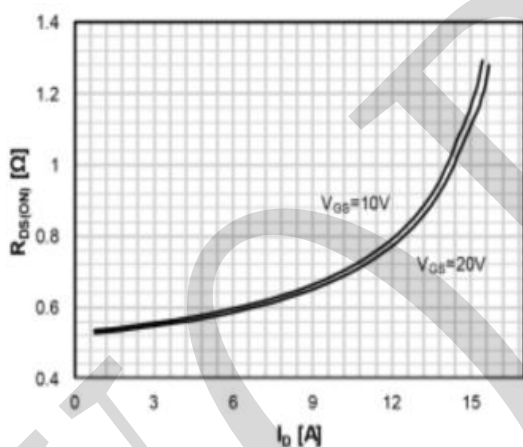


Fig. 3 On-state Resistance

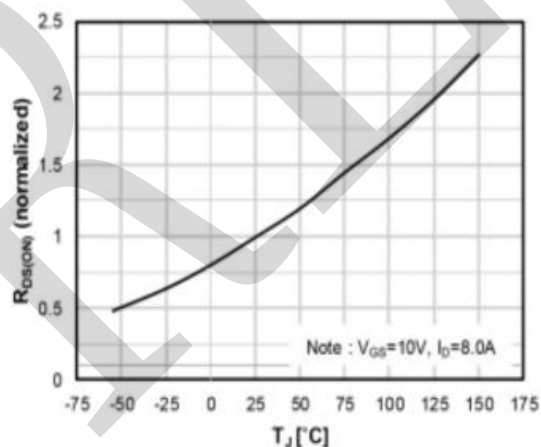


Fig. 4 On-state Resistance with Temperature

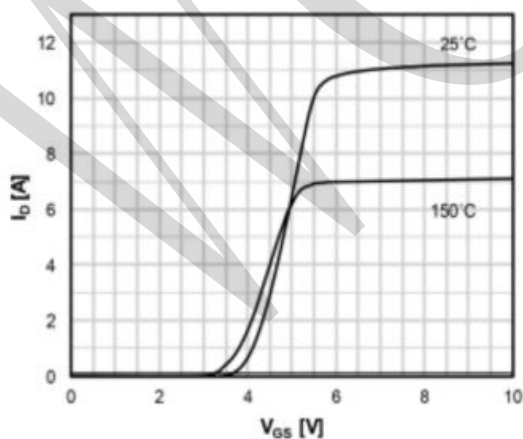


Fig. 5. Transfer Characteristics







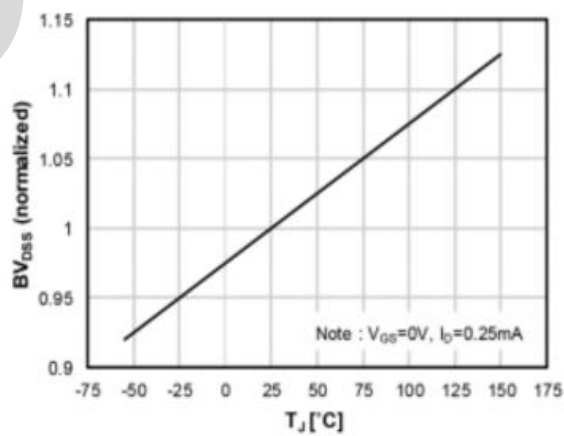


Fig 6. Breakdown Voltage with Temperature


Typical Characteristics

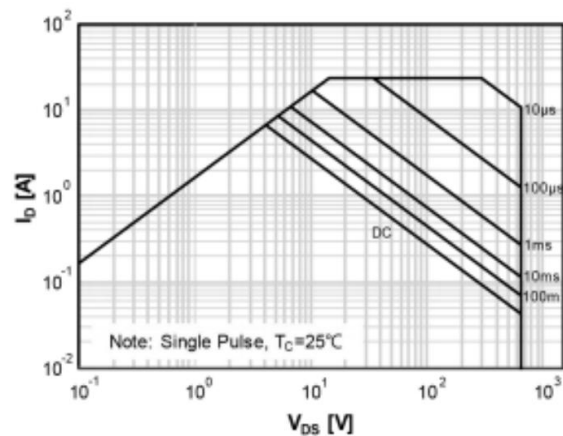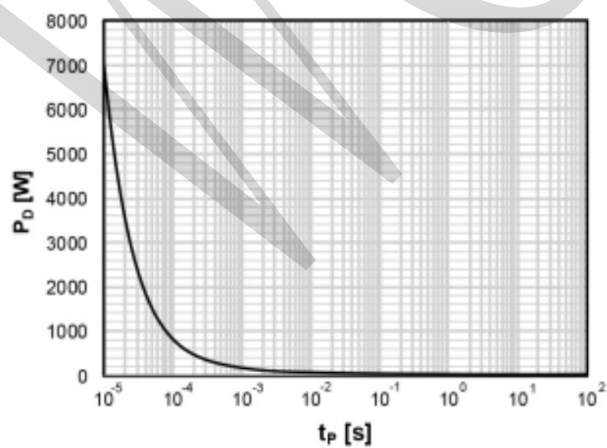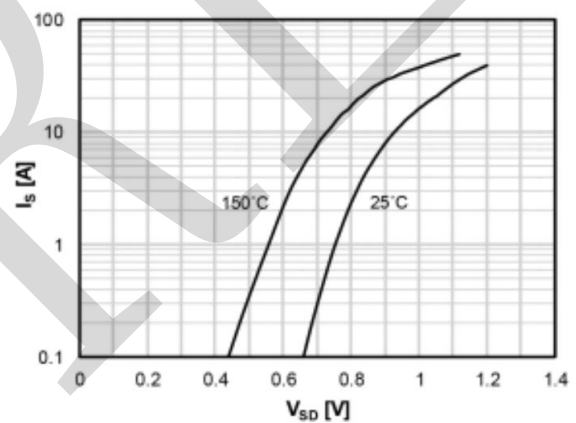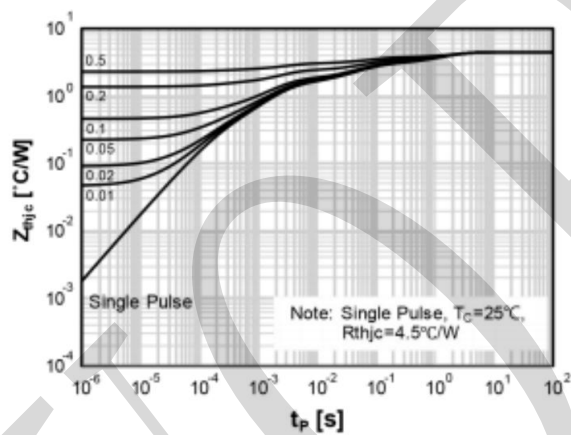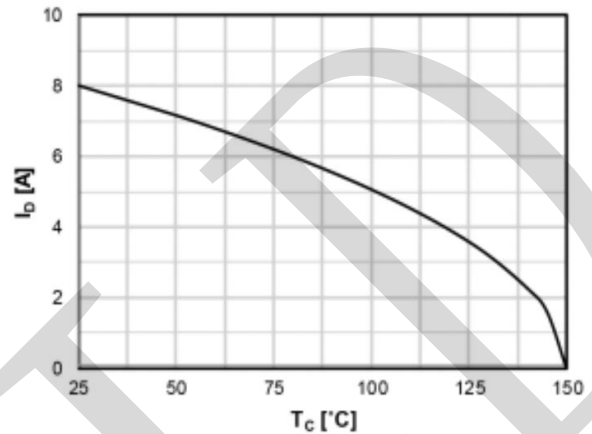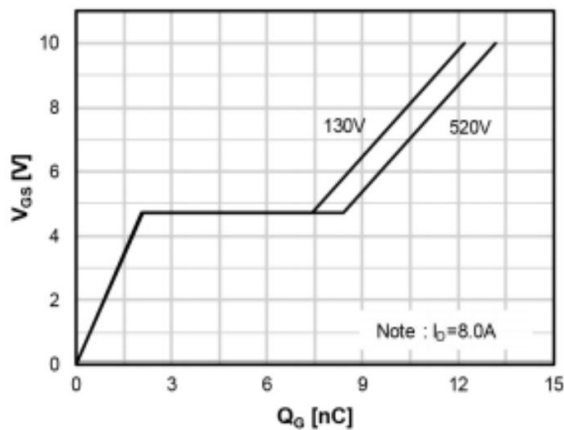

PACKAGE OUTLINE DIMENSIONS

Note:unit mm

TO-252

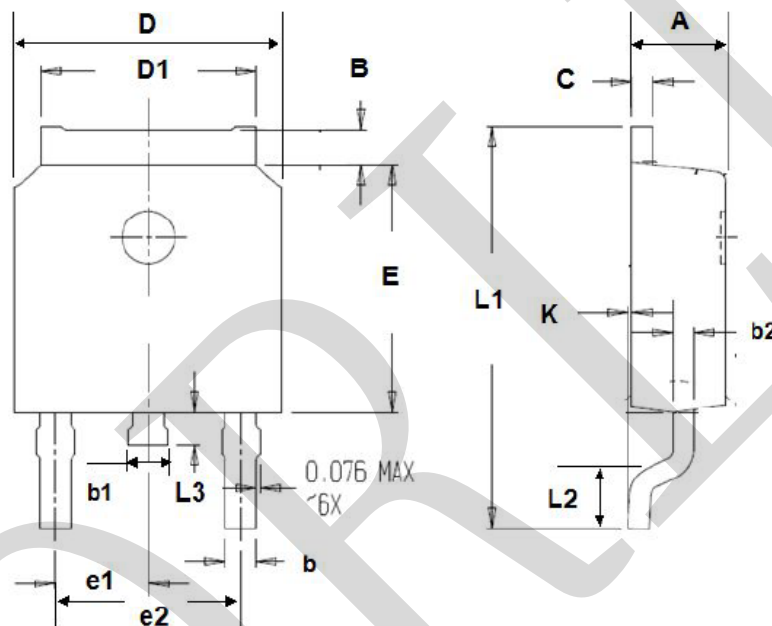

单位:毫米/UNIT: mm

符号 SYMBOL	最小值 min	最大值 max	符号 SYMBOL	最小值 min	最大值 max
A	2.10	2.50	B	0.85	1.25
b	0.50	0.80	b1	0.70	1.20
b2	0.45	0.70	C	0.45	0.70
D	6.30	6.75	D1	5.10	5.50
E	5.30	6.30	e1	2.25	2.35
L1	9.20	10.60	e2	4.45	4.75
L2	0.90	1.75	L3	0.60	1.10
K	0.00	0.23			